

# Universal Mount Assembly

Part Number | MT-MR-UM-A-12-06-14-01-AS

## PRO TIP

The **Universal Mount** works both inside and outside of the truss.



### Universal Mount Biscuit

MT-MR-UM-B-07-01  
Weight | 3.75lbs (1.70kg)



### Universal Mount Half 12" x 6"

MT-MR-UM-A-12-06-14-01  
Weight | 11.60lbs (5.26kg)

## Components Included

- Qty. 2 - MT-MR-UM-A-12-06-14-01
- Qty. 2 - MT-MR-UM-B-07-01
- Qty. 2 - MT-HW-P-AS-0300-0100-0106
- Qty. 4 - MT-HW-P-CP-0448-0012-0110

**Vertical Load Capacity = 2,000lbs**

<b>Standard Material</b>	A36 Low Carbon Steel
<b>Standard Finish</b>	10 - Zinc Clear   Pin 11 - Zinc Gold/Yellow
<b>Available Finish(es)</b>	N/A
<b>Size</b>	N/A - Components are multi-configurable
<b>Weight</b>	32.30lbs (14.65kg)
<b>Hole Size</b>	11/16" (17.46mm)   1.03" - Fits 1.0" Pin (26.162mm Fits 25.4mm Pin)
<b>Recommended Hardware</b>	5/8"-11 Thread Grade 8 Bolt, 2.5" Long   5/8" SAE Zinc-Plated Washer   5/8"-11 Thread, Grade 8 Hex Nut (M16 x 2 Thread, 65mm Long, Class 10.9 Bolt   M16, Class 10.9 Washer   M16 x 2 Thread, Class 10.9 Nut)
<b>Recommended Tools</b>	Tool Kit 1
<b>For More Info</b>	<a href="http://www.ModTruss.com">www.ModTruss.com</a>



Electrical Hazard



Flammability



In Stock



Made To Order



Customizable



Reusable



Compatible







Serialized & Traceable

U.S. Patent No. 8,418,425 & other patents pending

# Series | MR Motion & Rigging

Product Number | MT-MR-UM-A-12-06-14-01-AS

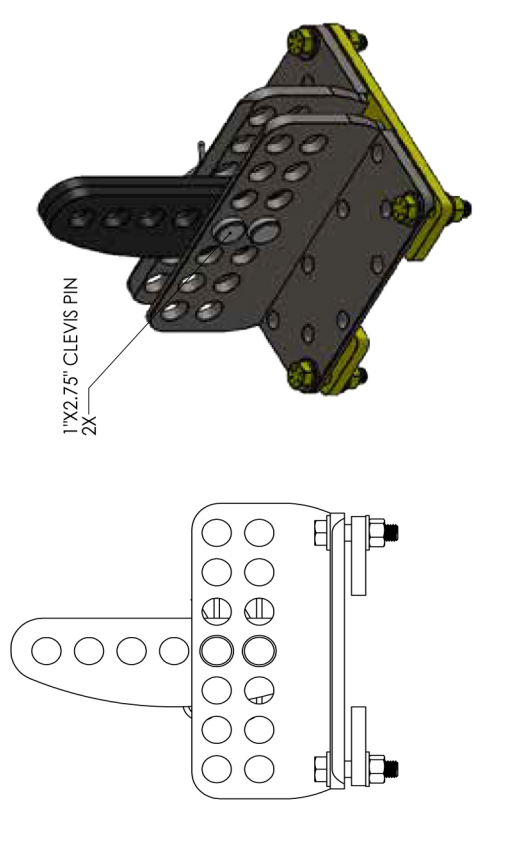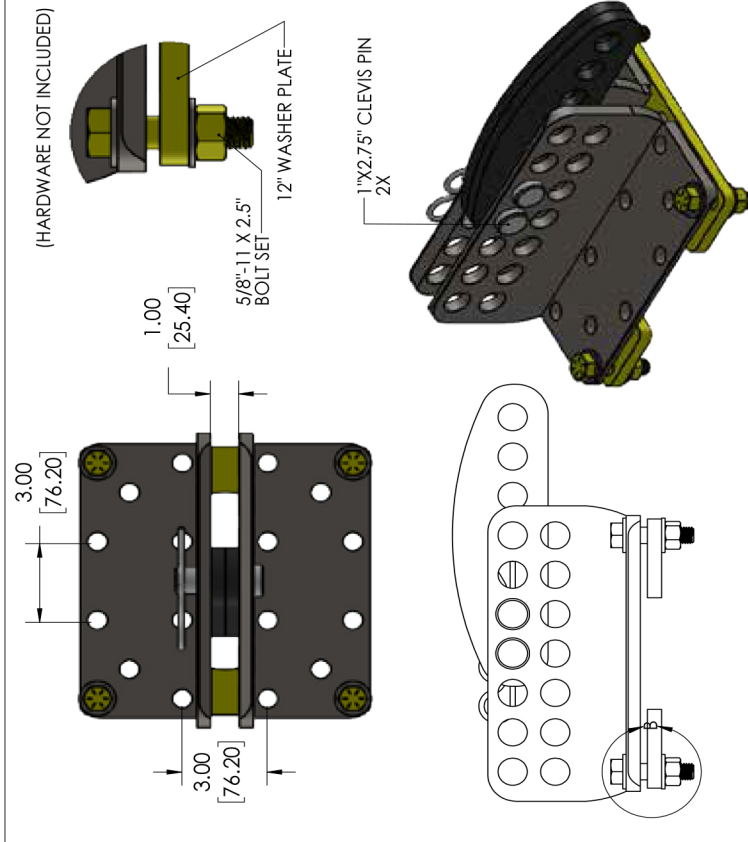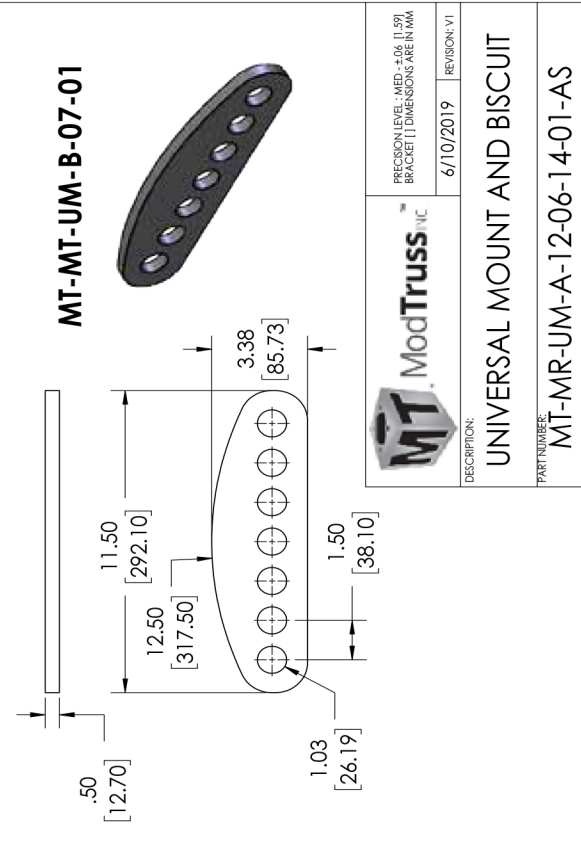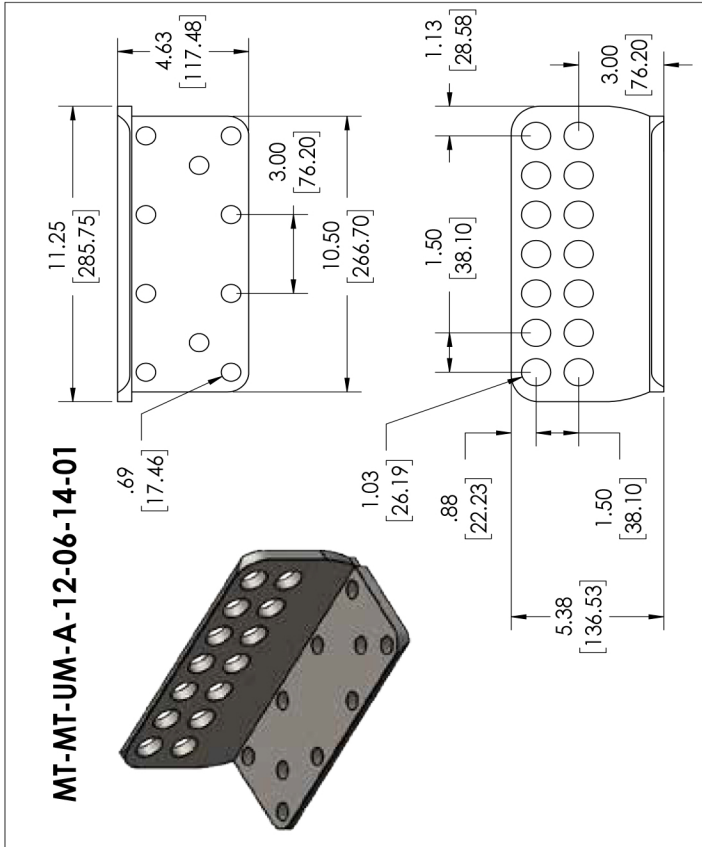

	PRECISION LEVEL: MED = ±.06 [1.57] BRACKET [ ] DIMENSIONS ARE IN MM
	6/10/2019 REVISION: V1
DESCRIPTION: <b>UNIVERSAL MOUNT AND BISCUIT</b>	
PART NUMBER: <b>MT-MR-UM-A-12-06-14-01-AS</b>	